

检 验 报 告

Test Report

产 品 名 称 : 锂离子聚合物电池组/二次鋰電池組

Sample Name : Rechargeable Li-ion Polymer Battery


型号 : BN5X

Model/ Type : BN5X

委托单位 : 珠海冠宇电池股份有限公司

Client : Zhuhai CosMX Battery Co., Ltd.

珠海冠宇电池股份有限公司测试中心
Test Center of Zhuhai CosMX Battery Co., Ltd.



Applicant information 申请资料		
Name of samples: 样品名称:	Rechargeable Li-ion Polymer Battery 锂离子聚合物电池组/二次锂电池组	
Type/Model: 型号规格:	BN5X 3.84Vdc 5060mAh/19.44Wh(Rated) 5160mAh/19.82Wh (Typical)	
Lithium content:: 锂含量:	—	
Commission by: 委托单位:	Zhuhai CosMX Battery Co., Ltd. 珠海冠宇电池股份有限公司	
Commissioner address: 委托单位地址:	(South Zone, First Floor, A Work Factory) No.209, Zhufeng Road, Jing'an Town, Doumen District, Zhuhai City, Guangdong, P.R. China 广东省珠海市斗门区井岸镇珠峰大道 209 号 (A厂房首层南区)	
Manufacturer: 制 造 商:	Zhuhai CosMX Battery Co., Ltd. 珠海冠宇电池股份有限公司	
Manufacturer Address: 制造商地址:	(South Zone, First Floor, A Work Factory) No.209, Zhufeng Road, Jing'an Town, Doumen District, Zhuhai City, Guangdong, P.R. China 广东省珠海市斗门区井岸镇珠峰大道 209 号 (A厂房首层南区)	
Factory: 生产厂:	Zhuhai CosMX Power JinWan Subsidiary Co., Ltd. 珠海冠宇电源有限公司金湾分公司	
Factory address: 生产厂地址:	Workshop No.1,No.2,No.3(first,fourth and fifth floors)and No.5,No.3 Qingwan three Road,Qingwan Industry Park, Sanzao Town,Jinwan District,Zhuhai City,Guangdong ,P.R.China. 广东省珠海市金湾区三灶镇青湾工业区青湾三路3号的厂房一、厂房二、厂房三（一层、四层、五层）、厂房五	
Appearance: 样品外观颜色:	Silver &Golden 银色和金色	
Sample status: 样品状态:	Good 完好	
Quantity of sample: 样品数量:	48Pcs	
Sample identification: 样品标识序号:	N2024-05-3927-001~018 N2024-05-3945-001~030	
Receiving date: 接样日期:	2024.05.16	
Start test date: 测试开始日期:	2024.05.16	
Completing date: 完成日期:	2024.06.02	
Conclusion/结论: The submitted samples comply with the requirements of Section 38.3 of the Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 样品符合联合国《试验和标准手册》第七修订版第 38.3 节的要求。		
Tested : 测试:	Fang Ju 方菊 Test Engineer 测试工程师	 Seal/检验专用章: Date of issue: 2024.06.05 测试中心
Reviewed : 审核:	Wang Li 王利 Quality Manager 质量负责人 Xiao Duoyu 肖铎渔 Technical Manager 技术负责人	
Approved : 批准:	Dong Jiaqin 董家勤 Authorized Manager 授权签字人	

General product information

样品描述及说明

Sample Type:

样品类型:

Rechargeable or not
是否可充电Yes
是☐ Cell
电池Use
用途

—

Electrochemistry
System
电池化学组分

--

☒ Battery
电池组Use
用途Mobile Phone
手机Battery Model
型号

BN5X

Composing Mode
组成方式1S1P
1串1并Electrochemistry
System
电池化学组分LiCoO₂
钴酸锂Cell model
电池型号

CA436799F

Cell Capacity
电池容量Typ: 5180mAh
Min: 5080mAhManufacturer Of Cell
电池生产厂Chongqing CosMX Battery Co., Ltd
重庆冠宇电池有限公司

Sample parameters:

样品参数:

Nominal Voltage
标称电压

3.84V

Rated Capacity
额定容量

5060mAh

Rated Energy
额定能量

19.44Wh

Limited Charging
Voltage
充电限制电压

4.45V

Max Charging
Current
最大持续充电电流

3.600A

Standard Charging
Current
标准充电电流

2.540A

Discharge
Cut-off Voltage
放电终止电压

3.00V

Max Discharging
Current
最大持续放电电流

3.000A

Charge Cut-off
Current
充电截止电流


0.1016A

Test Conclusion 测试结论					
No. 序号	Name of test 测试项目名称	The submitted samples comply with the requirements of Section 38.3 of the Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7 样品符合联合国《试验和标准手册》第七修订版第38.3节的要求。	Test result 测试结果	Conclusion 本项结论	Remark 备注
1	Altitude simulation 高度模拟		See Appendix 1	P	
2	Thermal test 温度试验		See Appendix 2	P	
3	Vibration 振动		See Appendix 3	P	
4	Shock 冲击		See Appendix 4	P	
5	External Short-circuit 外部短路		See Appendix 5	P	
6	Impact 撞击		See Appendix 6	N/A	
	Crush 挤压		See Appendix 6	P	N2024-05-3945
7	Overcharge 过度充电		See Appendix 7	P	
8	Forced discharge 强制放电		See Appendix 8	P	N2024-05-3945

Photos of samples and markings

样品及标识照片


Battery (BN5X 3.84Vdc 5060mAh/19.44Wh(Rated) 5160mAh/19.82Wh (Typical))

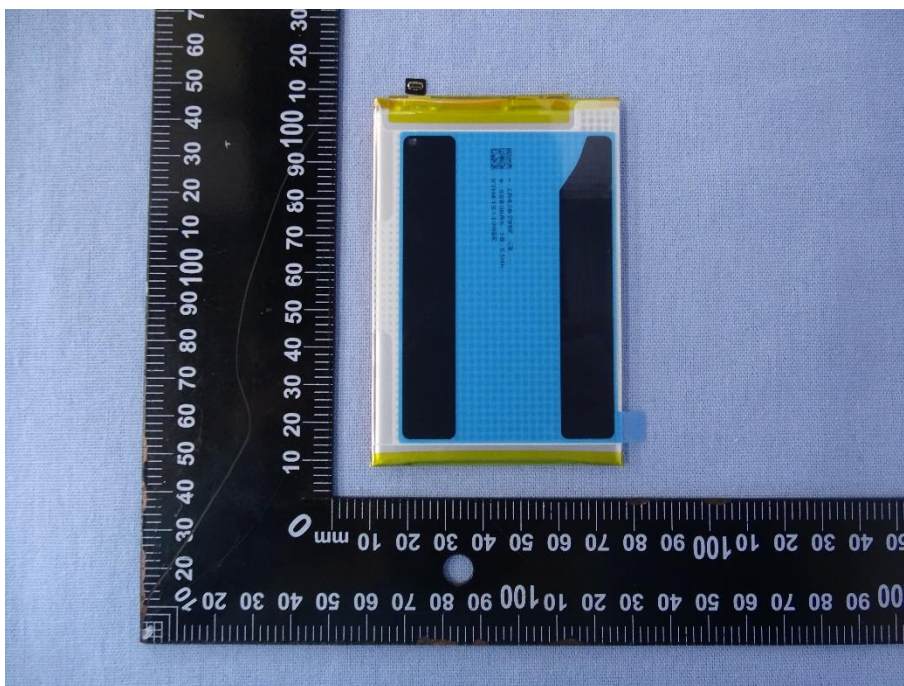

Photos of samples and markings

样品及标识照片

Cell (CA436799F 3.84V 5080mAh)

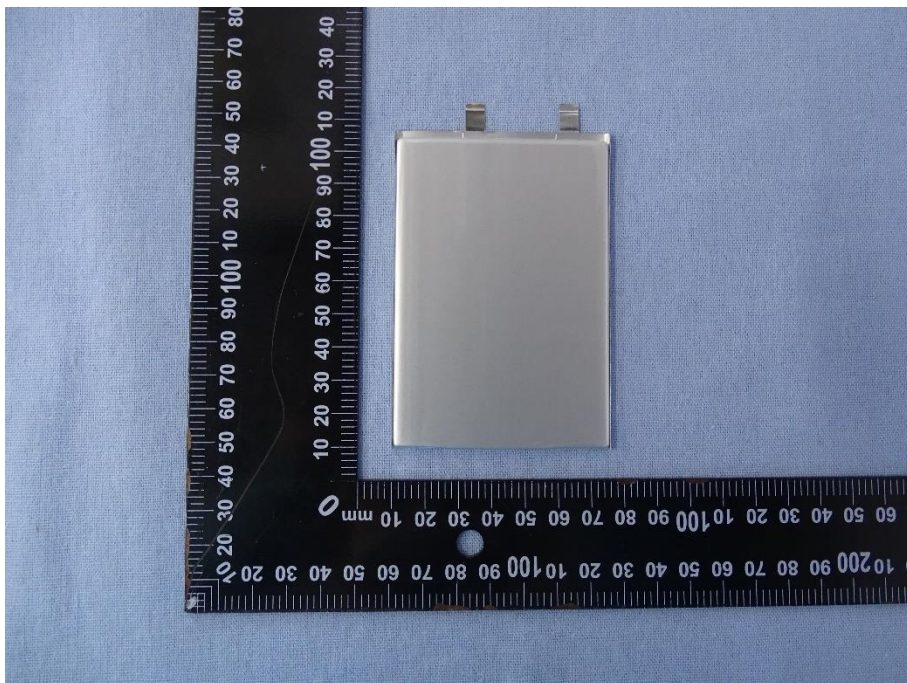

Appendix 1

附表 1

Test Items 测试项目	Altitude simulation 高度模拟						
1.1	Test procedure 测试步骤						
	Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hours at ambient temperature (20±5℃). 试验电池芯和电池在环境温度(20±5℃)下，储存在小于等于11.6kPa的压力下至少六小时。						
1.2	Sample status 样品状态						
	N2024-05-3927-009 ~ 013, at first cycle in fully charged states;在第1个循环完全充电; N2024-05-3927-014 ~ 018, after 25 cycles in fully charged states.在第25个循环完全充电。						
1.3	Result 测试结果						
Sample No. 样品编号	Before Test测试前		After Test测试后		Mass loss 质量损失 (M<1g: 0.5% 1g≤M≤75g: 0.2% M>75g: 0.1%)	Residual OCV 剩余电压 (≥90%)	Test result 测试结果
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量 (g)	Voltage 开路电压 (V)			
N2024-05-3927-009	69.2118	4.4327	69.2064	4.4301	0.0078	99.9416	O
N2024-05-3927-010	69.0319	4.4322	69.0254	4.4296	0.0094	99.9400	O
N2024-05-3927-011	69.2084	4.4316	69.2020	4.4290	0.0092	99.9411	O
N2024-05-3927-012	69.3583	4.4318	69.3525	4.4290	0.0084	99.9361	O
N2024-05-3927-013	69.2064	4.4320	69.2000	4.4294	0.0092	99.9425	O
N2024-05-3927-014	69.3036	4.4299	69.2968	4.4286	0.0098	99.9716	O
N2024-05-3927-015	69.1259	4.4294	69.1186	4.4282	0.0106	99.9709	O
N2024-05-3927-016	69.1911	4.4305	69.1850	4.4292	0.0088	99.9722	O
N2024-05-3927-017	68.9824	4.4295	68.9773	4.4282	0.0074	99.9725	O
N2024-05-3927-018	69.6059	4.4311	69.6008	4.4299	0.0073	99.9725	O
Note: L-Leakage, V-Venting, D -Disassembly, R -Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire. 注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。							

Appendix 2

附表 2

Test Items 测试项目	Thermal test 温度测试						
1.1	Test procedure 测试步骤						
	Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72\pm 2^{\circ}\text{C}$, followed by storage for at least six hours at a test temperature equal to $-40\pm 2^{\circ}\text{C}$. The maximum time interval between test temperature extremes in 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20\pm 5^{\circ}\text{C}$). 将电芯和电池在温度为 $72\pm 2^{\circ}\text{C}$ 的条件下贮存不少于6个小时,然后,在温度 $-40\pm 2^{\circ}\text{C}$ 条件下贮存不少于6个小时,两个温度间的间隔最长为30min,重复操作上述步骤直到10次,然后,将其在环境温度为 $20\pm 5^{\circ}\text{C}$ 的条件下放置24个小时。						
1.2	Sample status 样品状态						
	N2024-05-3927-009 ~ 013, at first cycle in fully charged states;在第1个循环完全充电; N2024-05-3927-014 ~ 018, after 25 cycles in fully charged states.在第25个循环完全充电。						
1.3	Result 测试结果						
Sample No. 样品编号	Before Test测试前		After Test测试后		Mass loss 质量损失 ($M < 1\text{g}$: 0.5% $1\text{g} \leq M \leq 75\text{g}$: 0.2% $M > 75\text{g}$: 0.1%)	Residual OCV 剩余电压 ($\geq 90\%$)	Test result 测试结果
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量 (g)	Voltage 开路电压 (V)			
N2024-05-3927-009	69.2064	4.4301	69.1937	4.3397	0.0184	97.9588	O
N2024-05-3927-010	69.0254	4.4296	69.0124	4.3370	0.0188	97.9095	O
N2024-05-3927-011	69.2020	4.4290	69.1906	4.3401	0.0165	97.9919	O
N2024-05-3927-012	69.3525	4.4290	69.3408	4.3367	0.0169	97.9171	O
N2024-05-3927-013	69.2000	4.4294	69.1900	4.3373	0.0145	97.9194	O
N2024-05-3927-014	69.2968	4.4286	69.2870	4.3421	0.0141	98.0457	O
N2024-05-3927-015	69.1186	4.4282	69.1091	4.3411	0.0137	98.0348	O
N2024-05-3927-016	69.1850	4.4292	69.1732	4.3423	0.0171	98.0362	O
N2024-05-3927-017	68.9773	4.4282	68.9658	4.3431	0.0167	98.0778	O
N2024-05-3927-018	69.6008	4.4299	69.5901	4.3451	0.0154	98.0857	O
Note: L-Leakage, V-Venting, D -Disassembly, R -Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire. 注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。							

Appendix 3

附表 3

Test Items 测试项目	Vibration 振动						
1.1	Test procedure 测试步骤						
	Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal wave form with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting position of the cell. 将电芯和电池牢固地安装在振动台的台面上，然后开始振动。振动以正弦波形式，以7Hz增加至200Hz，然后再减少回到7Hz为一个循环，一个循环持续15分钟的对数扫频。每个电芯和电池从三个互相垂直的方向上循环12次，3个小时。						
1.2	Sample status 样品状态						
	N2024-05-3927-009 ~ 013, at first cycle in fully charged states;在第1个循环完全充电; N2024-05-3927-014 ~ 018, after 25 cycles in fully charged states.在第25个循环完全充电。						
1.3	Result 测试结果						
Sample No. 样品编号	Before Test测试前		After Test测试后		Mass loss 质量损失 (M<1g: 0.5% 1g≤M≤75g: 0.2% M>75g: 0.1%)	Residual OCV 剩余电压 (≥90%)	Test result 测试结果
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量 (g)	Voltage 开路电压 (V)			
N2024-05-3927-009	69.1937	4.3397	69.1933	4.3395	0.0006	99.9949	O
N2024-05-3927-010	69.0124	4.3370	69.0117	4.3364	0.0010	99.9871	O
N2024-05-3927-011	69.1906	4.3401	69.1901	4.3397	0.0007	99.9915	O
N2024-05-3927-012	69.3408	4.3367	69.3405	4.3364	0.0004	99.9910	O
N2024-05-3927-013	69.1900	4.3373	69.1892	4.3369	0.0012	99.9922	O
N2024-05-3927-014	69.2870	4.3421	69.2859	4.3418	0.0016	99.9929	O
N2024-05-3927-015	69.1091	4.3411	69.1088	4.3408	0.0004	99.9924	O
N2024-05-3927-016	69.1732	4.3423	69.1730	4.3420	0.0003	99.9936	O
N2024-05-3927-017	68.9658	4.3431	68.9652	4.3429	0.0009	99.9938	O
N2024-05-3927-018	69.5901	4.3451	69.5893	4.3448	0.0011	99.9940	O
Note: L-Leakage, V-Venting, D -Disassembly, R -Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire. 注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F - 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。							

Appendix 4

附表 4

Test Items 测试项目	Shock 冲击						
1.1	Test procedure 测试步骤						
	Test cells and batteries shall be secured to the testing machine, and each cell shall be subjected to a half-sine shock of peak acceleration of 150g_n and pulse duration of 6 milliseconds. Large cells may be subjected to a half-sine shock of peak acceleration of 50g_n and pulse duration of 11 milliseconds. Small batteries shall be subjected to a half-sine shock of peak acceleration of 150g_n (or Acceleration(g_n)= $\sqrt{\frac{100850}{mass}}$, which is smaller) and pulse duration of 6 milliseconds. Each cell or battery shall be subjected to three shocks in the positive direction followed by three shocks in the negative direction of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks 以稳固的托架固定住每个电芯和电池样品的全部配件表面。对每个电芯以峰值为150g_n的半正弦的加速度撞击, 脉冲持续6毫秒, 大型电芯须经受最大加速度50g_n和脉冲持续时间11毫秒的半正弦波冲击。对每个电池以峰值为150g_n (或与$\sqrt{\frac{100850}{mass}}$中的较小值) 的半正弦的加速度撞击, 脉冲持续6毫秒, 每个电池或电池组须在三个互相垂直的电池安装方位的正方向经受三次冲击, 接着在反方向经受三次冲击, 总共经受18次冲击。						
1.2	Sample status 样品状态						
	N2024-05-3927-009 ~ 013, at first cycle in fully charged states;在第1个循环完全充电; N2024-05-3927-014 ~ 018, after 25 cycles in fully charged states.在第25个循环完全充电。						
1.3	Result 测试结果						
Sample No. 样品编号	Before Test测试前		After Test测试后		Mass loss 质量损失 (M<1g: 0.5% 1g≤M≤75g: 0.2% M>75g: 0.1%)	Residual OCV 剩余电压 (≥90%)	Test result 测试结果
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量 (g)	Voltage 开路电压 (V)			
N2024-05-3927-009	69.1933	4.3395	69.1924	4.3394	0.0013	99.9986	O
N2024-05-3927-010	69.0117	4.3364	69.0107	4.3363	0.0014	99.9970	O
N2024-05-3927-011	69.1901	4.3397	69.1893	4.3397	0.0012	99.9995	O
N2024-05-3927-012	69.3405	4.3364	69.3400	4.3363	0.0007	99.9998	O
N2024-05-3927-013	69.1892	4.3369	69.1885	4.3368	0.0010	99.9975	O
N2024-05-3927-014	69.2859	4.3418	69.2842	4.3417	0.0025	99.9979	O
N2024-05-3927-015	69.1088	4.3408	69.1074	4.3407	0.0020	99.9986	O
N2024-05-3927-016	69.1730	4.3420	69.1723	4.3419	0.0010	99.9982	O
N2024-05-3927-017	68.9652	4.3429	68.9644	4.3427	0.0012	99.9963	O
N2024-05-3927-018	69.5893	4.3448	69.5885	4.3447	0.0011	99.9970	O
Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire. 注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。							

Appendix 5

附表 5

Test Items 测试项目	External short circuit 外部短路		
1.1	Test procedure 测试步骤		
	The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches $57\pm4^{\circ}\text{C}$ and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at $57\pm4^{\circ}\text{C}$. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57\pm4^{\circ}\text{C}$, the cell or battery must be observed for a further six hour for the test to be concluded. 保持试验环境温度稳定在$57\pm4^{\circ}\text{C}$，以使电芯或电池样品外表温度达到$57\pm4^{\circ}\text{C}$，然后，在此温度下，将其正负极用小于0.1欧姆的线路短接，待电芯或电池的外表温度恢复到$57\pm4^{\circ}\text{C}$之后再持续1小时以上，对电芯或电池必须进一步观察6个小时才能下结论。		
1.2	Sample status 样品状态		
	N2024-05-3927-009 ~ 013, at first cycle in fully charged states;在第1个循环完全充电; N2024-05-3927-014 ~ 018, after 25 cycles in fully charged states.在第25个循环完全充电。		
1.3	Result 测试结果		
Sample No. 样品编号	Max. External Temperature 样品表面最高温度($^{\circ}\text{C}$)	Test result 测试结果	Remark 备注
N2024-05-3927-009	57.1	O	—
N2024-05-3927-010	57.2	O	—
N2024-05-3927-011	56.8	O	—
N2024-05-3927-012	57.2	O	—
N2024-05-3927-013	57.2	O	—
N2024-05-3927-014	56.7	O	—
N2024-05-3927-015	57.0	O	—
N2024-05-3927-016	56.8	O	—
N2024-05-3927-017	58.5	O	—
N2024-05-3927-018	57.3	O	—
Note: D –Disassembly, R –Rupture, F –Fire, OT –Over Temperature, O –no disassembly, no rupture, no fire, no Over temperature 注: D- 解体; R- 破裂; F- 起火; OT- 超过 170°C ; O- 无解体、无破裂、无起火、不超过 170°C			

Appendix 6

附表 6

Test Items 测试项目	Crush 挤压			
1.1	Test procedure 测试步骤			
	A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached. (a) The applied force reaches 13kN±0.78kN; (b) The voltage of the cell drops by at least 100 mV; or (c) The cell is deformed by 50% or more of its original thickness. 电池芯或组成电池芯在两个平面间挤压。挤压在第一个接触点以约1.5cm/s 的速度慢慢进行，直到下面三个选项之一达到为止：(a)作用力达到 13kN±0.78kN；(b)电池芯电压降至少达到100mV；(c)电池厚度和最初比较变形至少50%。			
1.2	Sample status 样品状态			
	N2024-05-3945-021 ~ 025, at first cycle at 50% of the design rated capacity;在第1个循环充50%的额定容量； N2024-05-3945-026 ~ 030, after 25 cycles at 50% of the design rated capacity. 在第25个循环充50%的额定容量。			
1.3	Result 测试结果			
Sample No. 样品编号	Max. External Temperature 样品表面最高温度(℃)	Ending condition 终止条件	Test result 测试结果	Remark 备注
N2024-05-3945-021	23.2	a	O	—
N2024-05-3945-022	22.6	a	O	—
N2024-05-3945-023	23.8	a	O	—
N2024-05-3945-024	24.2	a	O	—
N2024-05-3945-025	24.0	a	O	—
N2024-05-3945-026	24.4	a	O	—
N2024-05-3945-027	24.3	a	O	—
N2024-05-3945-028	24.4	a	O	—
N2024-05-3945-029	24.2	a	O	—
N2024-05-3945-030	24.1	a	O	—
Note: D -Disassembly, R -Rupture, F -Fire, OT –Over Temperature, O - no disassembly, no fire, no Over temperature 注：D- 解体；R- 破裂；F - 起火；OT– 超过170℃；O-无解体、无起火、不超过170℃				

Appendix 7

附表 7

Test Items 测试项目	Overcharge 过度充电			
1.1	Test procedure 测试步骤			
	When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage or 22V, whichever is less. When the manufacturer's recommended charge voltage is more than 18V, the charging voltage of the test shall be 1.2 times maximum charge voltage. The charging current is 2 times of the maximum charging current recommended by the manufacturer. 如果厂家推荐的充电电压不超过18V，本测试的最小充电电压应该是两倍的厂家标定最大充电电压或者是22V，取其中较小者。如果厂家推荐的充电电压超过18V，充电电压应该为 1.2倍的厂家标定最大充电电压。充电电流为厂家推荐的最大充电电流2倍。			
1.2	Sample status 样品状态			
	N2024-05-3927-001 ~ 004, at first cycle in fully charged states; 在第1个循环完全充电; N2024-05-3927-005 ~ 008, after 25 cycles in fully charged states. 在第25个循环完全充电。			
1.3	Result 测试结果			
Sample No. 样品编号	Voltage Before test(V) 测试前开路电压(V)	test Voltage(V) 试验电压(V)	Test result 测试结果	Remark 备注
N2024-05-3927-001	4.4316	8.9000	O	—
N2024-05-3927-002	4.4316	8.9000	O	—
N2024-05-3927-003	4.4317	8.9000	O	—
N2024-05-3927-004	4.4320	8.9000	O	—
N2024-05-3927-005	4.4295	8.9000	O	—
N2024-05-3927-006	4.4307	8.9000	O	—
N2024-05-3927-007	4.4294	8.9000	O	—
N2024-05-3927-008	4.4302	8.9000	O	—
Note: D -Disassembly, F -Fire, O - no disassembly, no fire. 注: D- 解体; F- 起火; O-无解体、无起火。				

Appendix 8

附表 8

Test Items 测试项目	Forced discharge 强制放电				
1.1	Test procedure 测试步骤				
	Each cell shall be forced discharged at ambient temperature by connecting it in series with a DC12V power supply at an initial current equal to the maximum discharge current specified the manufacturer. The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval(in hours) equal to its rated capacity divided by the initial test current(Measured in amperes). 在20±5℃的环境温度下, 将单个电芯连接在12V的直流电源上进行强制放电, 此直流电源提供每个电芯初始电流为制造厂指定的最大放电电流, 放电时间为额定容量除以初始电流。				
1.2	Sample status 样品状态				
	N2024-05-3945-001 ~ 010, at first cycle in fully discharged states; 在第1个循环完全放电; N2024-05-3945-011 ~ 020, after 25 cycles ending in fully discharged states. 在第25个循环完全放电。				
1.3	Result 测试结果				
Sample No. 样品编号	Voltage Before test 测试前开路电压 (V)	Test result 测试结果	Sample No. 样品编号	Voltage Before test 测试前开路电压 (V)	Test result 测试结果
N2024-05-3945-001	3.1634	O	N2024-05-3945-011	3.3203	O
N2024-05-3945-002	3.1593	O	N2024-05-3945-012	3.3146	O
N2024-05-3945-003	3.1690	O	N2024-05-3945-013	3.3264	O
N2024-05-3945-004	3.1612	O	N2024-05-3945-014	3.3534	O
N2024-05-3945-005	3.1655	O	N2024-05-3945-015	3.3246	O
N2024-05-3945-006	3.1707	O	N2024-05-3945-016	3.3200	O
N2024-05-3945-007	3.1718	O	N2024-05-3945-017	3.3277	O
N2024-05-3945-008	3.1700	O	N2024-05-3945-018	3.3371	O
N2024-05-3945-009	3.1651	O	N2024-05-3945-019	3.3264	O
N2024-05-3945-010	3.1653	O	N2024-05-3945-020	3.3254	O
Note: D -Disassembly, F -Fire, O - no disassembly, no fire. 注: D- 解体; F - 起火; O-无解体、无起火。					

Test equipment list
仪器设备清单

No. 序号	Name 名 称	Type 型号	Equipment No. 编 号	Calibration Date 校准有效期至	Used 本次使用 (√)
1	Battery Charge And Discharging Tester 电池测试系统	CT3002K	GYA-E-8307	2024-11-06	√
2	Low Pressure Chamber 低压高空模拟试验箱	GX-3020-Z	GYA-O-0039	2024-07-26	√
3	Rapid Temperature Test 冷热冲击试验机	CZ-H-80B	GYA-T-0796	2024-08-07	√
4	Vibration Platform 振动试验台	ES-3-240	GYA-O-0687	2025-03-03	√
5	Shock Platform 冲击试验台	IS350	GYA-F-2221	2025-03-14	√
6	Crush Platform 伺服挤压试验机	BE-6045-2TD	GYA-F-2220	2025-01-10	√
7	DC regulated power supply 直流稳压电源	IT6512	GYA-E-1690	2024-07-26	√
8	DC regulated power supply 直流稳压电源	IT6512	GYA-E-1691	2024-07-26	√
9	DC regulated power supply 直流稳压电源	IT6163	GYA-E-1271	2024-07-26	√
10	DC regulated power supply 直流稳压电源	IT6522C	GYA-E-1616	2024-07-26	√
11	DC electronic load 直流电子负载	IT8816	GYA-E-1617	2024-07-26	√
12	DC regulated power supply 直流稳压电源	IT6512	GYA-E-1692	2024-07-26	√
13	DC electronic load 直流电子负载	IT6163	GYA-E-1693	2024-07-26	√
14	DC regulated power supply 直流稳压电源	IT6163	GYA-E-8285	2024-10-13	√
15	DC regulated power supply 直流稳压电源	IT6163	GYA-E-8286	2024-10-13	√
16	DC regulated power supply 直流稳压电源	IT6163	GYA-E-8287	2024-10-13	√

No. 序号	Name 名称	Type 型号	Equipment No. 编号	Calibration Date 校准有效期至	Used 本次使用 (√)
17	DC electronic load 直流电子负载	IT6163	GYA-E-1944	2024-10-13	√
18	DC electronic load 直流电子负载	IT6163	GYA-E-8301	2024-11-09	√
19	DC electronic load 直流电子负载	IT6163	GYA-E-2184	2025-04-10	√
20	Multichannel short circuit 电池短路试验机	GK-8048	GYA-T-0155	2024-07-25	√
21	Data Collector 数据采集仪	LR8431-30	GYA-E-0717	2025-03-10	√
22	Multichannel short circuit 电池短路试验机	GK-8048	GYA-T-0245	2024-07-25	√
23	Data Collector 数据采集仪	LR8431-30	GYA-E-1122	2024-11-09	√
24	Electronic Scale 电子天平	ESJ200-4B	GYA-F-1435	2024-07-27	√
25	Internal resistance tester 电压内阻测试仪	BT3562	GYA-E-1806	2025-04-10	√
26	Electronic Scale 电子天平	ESJ200-4B	GYA-F-3028	2024-11-10	√
27	Internal resistance tester 电压内阻测试仪	BT3562	GYA-E-5083	2025-04-10	√
28	PPG Tester PPG测试仪	ATMPPG200-1000	GYA-L-3086	2024-11-10	√
29	Internal resistance tester 电压内阻测试仪	BT3562	GYA-E-1875	2024-08-14	√
30	Electronic Scale 电子天平	ESJ200-4B	GYA-F-3027	2024-11-10	√
31	Data Collector 数据采集仪	LR8431-30	GYA-E-0401	2024-08-14	√

注 意 事 项

Attention

1. 本报告无检测单位“检验专用章”无效。
The test report is invalid without the official stamp of the lab.
2. 未经本实验室书面同意，不得部分地复制本报告。
Nobody is allowed to photocopy or partly photocopy this report without written permission of the lab.
3. 本报告无批准人、审核人签名无效。
The test report is invalid without the signature of ratifier, reviewer.
4. 本报告涂改无效。
The test report is invalid if altered.
5. 如果报告中部分项目相对于测试依据有偏离的，将在当前测试项目中予以说明。
If any test method is deviation from the designated test method, must be commented in the test data sheet.
6. 对检测报告若有异议，应于收到报告之日起十五天内向检测单位提出。
Objections to the test report must be submitted to lab within 15 days.
7. 本报告仅对送检样品负责。
The test report is valid for the tested sample only.
8. 本检测结果中“N/A”表示“不适用”，“P”表示“通过”，“F”表示“不通过”。
As for the test result “N/A” means “Not Applicable”, “P” means “Pass” and “F” means “Fail”.

珠海冠宇电池股份有限公司测试中心

Test Center of Zhuhai CosMX Battery Co., Ltd.

广东省珠海市斗门区井岸镇顺宇路 1 号

No.1, Shunyu Road, Jing'an Town, Doumen District, Zhuhai City, Guangdong,
P.R.China

TEL: 0756-6321999

E-mail:tc@cosmx.com

URL: http://www.cosmx.com

报告结束

END